


EE HOUSEGARD LUMA HUB KASUTUSJUHEND

MUDEL: GW650

Õnnitleme Housegard LUMA Hub'i ostu puhul! See hõlpsasti kasutatav juhend aitab oma uut seadet seadistada ja võtta sellest maksimumi.

1. ETTEVALMISTUSED

1. Veendu, et sul on Interneti-ühendusega 2.4 GHz Wi-Fi-ruuter.
2. Aktiivne Bluetooth ja ühenda oma mobiiltelefon koduse Wi-Fi'ga.



2. INSTALLI SMART LIFE RAKENDUS

Rakenduse saad alla laadida, otsides „Smart Life“ nutitelefonis otsingust või skannides järgmist QR-koodi, loo kasutaja ning logi sisse.



Pane tähele: rakenduse versiooniuuenduste tõttu võivad juhised erineda. Vajadusel järgi rakendusesiseseid juhiseid.



3. LISA HUB 2.4 GHZ WI-FI-VÕRKU

1. Ava rakendus.
2. Ühenda Hub vooluvõrku.
3. Hub kuvatakse automaatselt rakenduses Smart Life.
4. Hubi lisamiseks järgi rakenduse juhiseid.

Pane tähele: seadistamise saad muuta Hubi vaiknime, klikkides pliiatsi ikooni. ↙

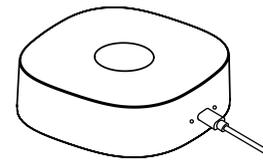

4. LISA HUBI SEADEID

1. Ava seaded ja kliki: "Lisa seade."
2. Seadmete lisamiseks järgi rakenduse juhiseid.
3. Kui sul on Housegard LUMA alarmid juba omavalhel ühendatud, lisatakse ühe seadme lisamisel kõik automaatselt.
4. Kui mitte, siis lisa kõik Housegard LUMA alarmid eraldi.


Pane tähele: korraga on võimalik siduda mitu sama tüüpi seadet.



Add Device




PAKENDIS KAASAS

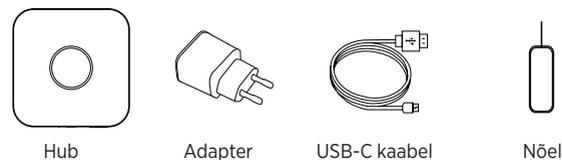


TEHNILISED ANDMED

Mudel: GW650
Toiteallikas: 220V USB C-adapter DC5V / 1A
Energiaarve: ≤1.5W
Wi-Fi ruuteri sagedus: 2.4 GHz
Toetatud rakendus: Smart Life – Smart Living
Maksimaalselt ühendatud üksused: 40 tk
Töösagedus: RF 868MHz
Edastuskaugus vabas õhus: kuni 100 m
Töötemperatuur: -10 °C kuni +55 °C
Niiskus: ≤95% suhteline õhuniiskus (ilma kondensatsioonita)
Mõõdud: 80 x 80 x 27 mm
Heakskiidud: CE, EMC, RED, ROHS, REACH

KUIDAS SEE TOIMIB

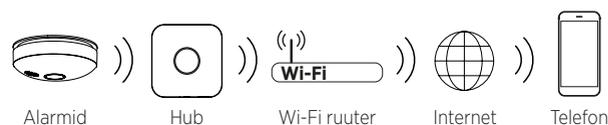

SEADME INFO

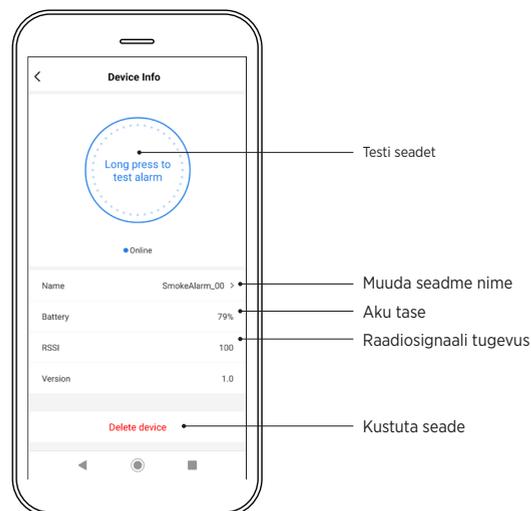

HUBI SEADEID



MÄRGUANDED


- **Vallandus tulekahju:** Kui häire käivitub, kuvatakse teade konkreetse seade kohta. Rakenduses saad alarmi asukoha tuvastada või vaigistada.
- **Testsündmus:** Kui testnuppu on vajutatud.
- **Seade on võrguühendusest:** Kui Hubi toide on lahti ühendatud või on võrguühendusest.
- **Madal akutase:** Kui aku tase on alla 10%.
- **Rikkeseadmus:** Kui keegi eemaldab alarmi selle kinnitusplaadilt.
- **Taastamise sündmus:** Kui keegi taasühendas alarmi plaadile.

TEHASESEADETE TAASTAMINE

Hubi lähtestamiseks vajuta lähtestusnuppu kümme korda kiiresti. Sinine LED-indikaator vilgub aeglaselt 5 sekundit, mis näitab lähtestamist. See kustutab kõik seadmed, Hubi-rakenduse sidumised ja konfiguratsioonid. Punane LED-tuli vilgub 60 sekundit.

LED-INDIKAATORI STAATUS

LED	STAATUS
Punane LED-tuli vilgub	Võrgustiku loomine
Roheline LED põleb	Võrgustik on loodud
Roheline LED-tuli vilgub	Alamseadme lisamine Hubi
Roheline LED põleb 2 sekundit	Alamseade on Hubi edukalt lisatud
Sinine LED-tuli vilgub aeglaselt 5 sekundit	Tehaseadete taastamine

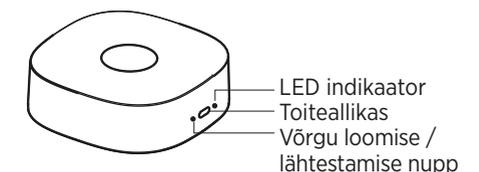

VEAOTSINGU JUHEND

PROBLEEM	TEGEVUS
Häireteateid ei kuvata mobiilis.	Kontrolli telefonis rakenduse seadeid ja luba/usalda Smart Life rakenduse märguandeid.
Hub ei ole rakenduses nähtav	Lülita Bluetooth sisse

GARANTII

Sellel seadmel on 5-aastane piiratud tootmisdefektide garantii (kehtib ostukuupäevast). Garantiivastutus on piiratud vastava ühiku väärtusega. Defektne seade tuleb koos probleemi kirjeldusega tagastada edasimüüjale. Heakskiidetud kaebused asendatakse sama või samaväärset tüüpi uue seadmega. Kaebuse korral tuleb esitada ostukuupäeva kinnitav kviitung.

TAASKASUTAMINE


Vastavalt elektri- ja elektroonikaseadmete jäätmete direktiivile 2012/19/EL ei tohielektriseadmeid ära visata koos tavalistemajapidamisjäätmetega. Patarei tuleb

GB HOUSEGARD LUMA HUB USER MANUAL
 MODEL: GW650

Congratulations on your purchase of the Housegard LUMA Hub! This easy-to-use guide will help you set up and make the most of your new device.

1. PREPARATIONS

1. Ensure you have a 2.4 GHz Wi-Fi router with an internet connection.
2. Activate Bluetooth and connect your mobile phone to the home Wi-Fi.



2. INSTALL SMART LIFE APP

You can download the app by searching "Smart Life" in mobile app stores or scanning below QR code, create an account, and log in.


Note: Due to app upgrades, instructions may vary slightly. Follow in-app instructions if needed.



3. ADD THE HUB TO 2.4GHZ WI-FI NETWORK

1. Open the app.
2. Connect the hub to power.
3. The hub will automatically appear in the Smart Life app.
4. Follow the app instructions to add the hub.

Note: You can change the hub's default name during setup by clicking on the PEN icon ✎



4. ADD DEVICES TO THE HUB

1. Open Devices and click Add Device.
2. Follow app instructions to add devices.
3. If you have interlinked Housegard LUMA alarms already, adding one device will automatically add all.
4. If not, add all Housegard LUMA alarms individually.


Note: You can pair multiple devices of the same type simultaneously.



Add Device




INCLUDED

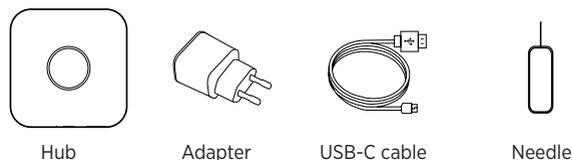


SPECIFICATIONS

Model: GW650
 Power source: 220V USB C Adapter DC5V / 1A
 Power consumption: ≤1.5W
 Wi-Fi router frequency: 2.4GHz
 Supported APP: Smart Life - Smart Living
 Maximum connected units: 40 pcs
 Working frequency: RF 868MHz
 Transmission distance open air: Up to 100 m
 Operating temperature: -10 °C to +55 °C
 Humidity: ≤95% RH (no condensation)
 Dimensions: 80 x 80 x 27 mm
 Approvals: CE, EMC, RED, ROHS, REACH


HOW IT WORKS

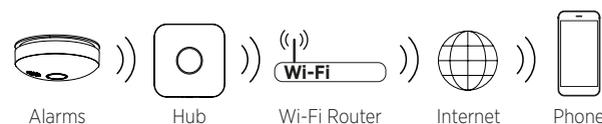

DEVICE INFORMATION

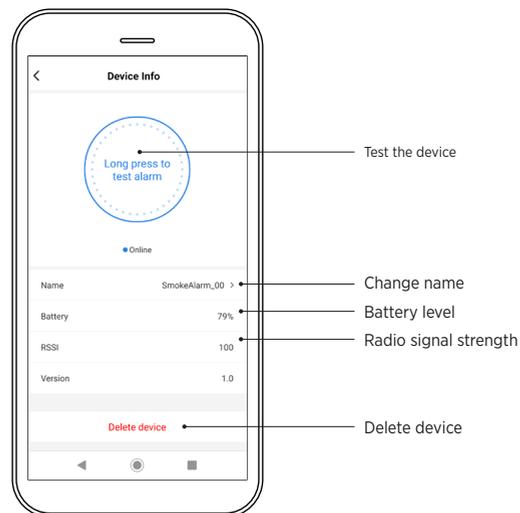

SETTINGS OF HUB

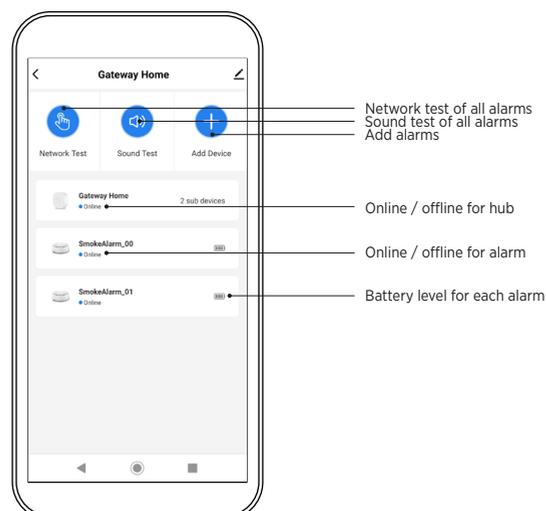

NOTIFICATIONS


- **Fire triggered:** When an alarm is triggered, a notification will indicate which specific device has been activated. You will be able to locate or silence the alarm in the app.
- **Test event:** When the test button has been pressed.
- **The device is offline:** When the hub or device power is disconnected or the hub or device offline.
- **Low battery:** If battery level is below 10%.
- **Tamper event:** If someone removes an alarm from its mounting plate.
- **Tamper recovery event:** If someone re-mounts an alarm to its plate.

FACTORY RESET:

To reset the hub, press the reset button ten times rapidly. The blue LED indicator will flash slowly for 5 seconds, indicating the reset. This deletes all devices, hub-APP bindings, and configurations. The red LED flashes for 60 seconds.

LED INDICATOR STATUS:

LED	STATUS
The red LED flashes	Networking
The green LED is on	Networking success
The green LED flashes	Adding a sub-device to the hub
The green LED on for 2 seconds	The sub-device has been added to the hub successfully
The blue LED flashes slowly for 5 seconds	Restore factory settings

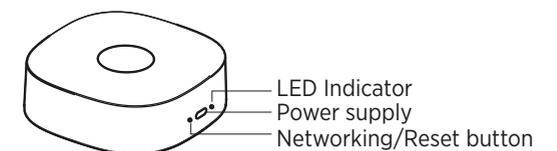

TROUBLE SHOOTING GUIDE

PROBLEM	ACTION
I'm not receiving alarm notifications on mobile phone.	Check app settings on phone and allow/trust notifications from Smart Life app.
Hub doesn't appear in App	Turn on Bluetooth

WARRANTY

This device comes with a 5-year limited warranty against manufacturing defects. (Valid from date of purchase.) Liability under the warranty is limited to the value of an equivalent hub device. Defective devices should be returned to the retailer, along with a description of the problem. If the claim is approved, the faulty goods will be replaced with a device of the same or an equivalent type. Any claim must be accompanied by a receipt confirming the date of purchase.

DISPOSAL

In accordance with the WEEE Directive 2012/19/EU, waste electrical products should not be disposed of with regular household waste.